

Tubulatura circulara


SR



Descriere

Tubulatura circulara cu falt elicoidal, disponibila in diametre cuprinse intre 100 si 1250 mm. Incepand cu diametrul 250 (inclusiv) este prevazuta cu corugatii exterioare pentru cresterea rigiditatii si a rezistentei la presiune negativa.

Dimensiuni

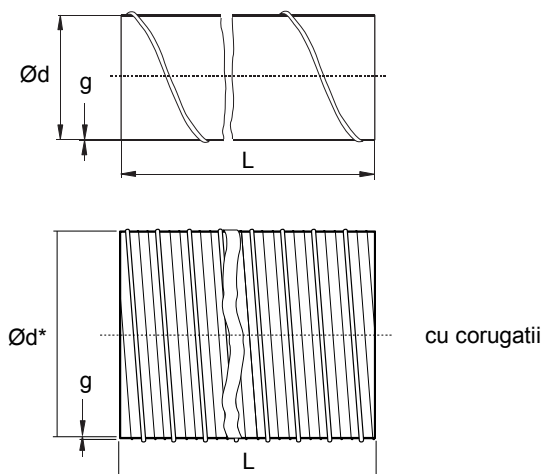

Dimensiuni

| Ød nom | g | kg/m |
|--------|-----|-------|
| 100 | 0,5 | 1,41 |
| 125 | 0,5 | 1,76 |
| 150 | 0,5 | 2,11 |
| 160 | 0,5 | 2,25 |
| 200 | 0,5 | 2,81 |
| 250* | 0,5 | 3,52 |
| 300* | 0,5 | 4,22 |
| 315* | 0,5 | 4,43 |
| 355* | 0,5 | 4,99 |
| 400* | 0,6 | 6,75 |
| 450* | 0,6 | 7,60 |
| 500* | 0,6 | 8,44 |
| 560* | 0,6 | 9,45 |
| 600* | 0,6 | 10,13 |
| 630* | 0,6 | 10,63 |
| 710* | 0,7 | 13,98 |
| 800* | 0,7 | 15,75 |
| 900* | 0,8 | 20,25 |
| 1000* | 0,8 | 22,50 |
| 1250* | 0,9 | 32,25 |

*cu corugatii de rigidizare

L (standard) = 3000 mm

